

Behavior of a tunnel face reinforced with longitudinal pipes - laboratory investigation

실내실험에 의한 수평보강재로 보강된 터널막장의 거동

유충식*¹, 양기호*²
 Yoo, Chung-Sik • Yang, Ki-Ho

Abstract

This paper presents the results of laboratory investigation on the deformation behavior of tunnel face reinforced with longitudinal pipes. A series of reduced-scale model tests was carried out to investigate the effect of reinforcement layout on the tunnel face axial displacement as well as the surface settlement. Among other things, the results of the model tests indicate that the axial displacement of tunnel face as well as the ground surface settlement can significantly be reduced by pre-reinforcing the tunnel face with longitudinal pipes, suggesting that the pre-reinforcing technique may effectively be used as a positive ground control method in the urban environments. Also illustrated is that the reinforcing effect is significantly influenced by the reinforcement layout. The implications of the findings from this study are discussed in a great detail.

Keywords: Face reinforcement, face stability, fiberglass pipe, reduced-scale laboratory test

요 지

본 논문에서는 수평보강재로 보강된 터널막장의 거동에 관한 내용을 다루었다. 터널막장 보강공법에 있어서 보강조건이 막장의 수평변위 및 지표침하에 미치는 영향을 고찰하기 위해 축소 모형실험을 수행하였다. 실험결과 수평보강재로 터널막장을 보강할 경우 막장의 변위 및 지표침하가 현저히 감소하는 것으로 나타나 도심지 터널시공에 있어서 지반거동 억제에 관한 보조 공법으로서 효과적으로 적용될 수 있는 것으로 나타났다. 아울러 지반거동 억제 효과는 보강조건에 따라 현저히 차이를 보이는 것으로 나타났다. 본 고에서는 연구결과를 종합하여 실무 적용시 주안점을 고찰하였다.

주요어: 막장 보강, 막장 안정, 유리섬유 보강재, 축소모형시험

*1 정회원, 성균관대학교 건축, 조경 및 토목공학부 부교수
 *2 성균관대학교 토목공학과 대학원 수료

1. Introduction

Rapid growth in urban development has resulted in an increased demand for construction of tunnels for electric and communication lines, and transportation systems. For obvious practical reasons such as accessibility, serviceability, and economy, these tunnels are constructed at shallow depths. Since the ground at shallow depths consists of either soft soils or weak rocks, the shallow tunnels are usually constructed by either shield or conventional tunneling methods such as NATM in conjunction with auxiliary ground improvement techniques. For tunnels constructed in soft ground or fault zone, maintaining the face stability is one of the most important excavation design issues since the failure of the tunnel face causes loosening of the ground and may thereby lead to a complete tunnel collapse.

European countries such as Italy and France have been successfully implementing the tunnel face reinforcing technique using longitudinal fiberglass pipes grouted into the tunnel face to improve the face stability during excavation with good results in terms of safety and speed of construction. Figure 1 illustrates a schematic view of the technique. The fiberglass pipes have become popular due to its

cost-effectiveness, and a few technical advantages such as high longitudinal strength while relatively brittle in the transverse direction hence easily breakable during excavation. This technique is often combined with prevaults such as pipe umbrella to eliminate entirely unsupported spans in weak ground.

In recent years, there have been numerous studies on the behavior of tunnel face reinforced with longitudinal pipes based on small-scale laboratory model tests including centrifuge tests (Hallak et al., 1994; Calvello and Taylor, 1999), field tests (Arsena et al., 1991; Lunardi et al., 1991; Lunardi et al., 1992), numerical experiments (Peila, 1994; Poma et al., 1995; Peila et al., 1996; Yoo & Shin, 1999), and analytical approaches (Jassionesse, 1996; Dias et al., 1998; Wong et al., 1997). Majority of the investigations, however, have been focused on the general behavior of the reinforced tunnel face and studies on the effect of the reinforcement layout on the face movement and the surface settlement are limited. Therefore, much still need to be investigated in order to improve the current design approaches and to evaluate the effectiveness of the technique for use as a positive measure for surface settlement control.

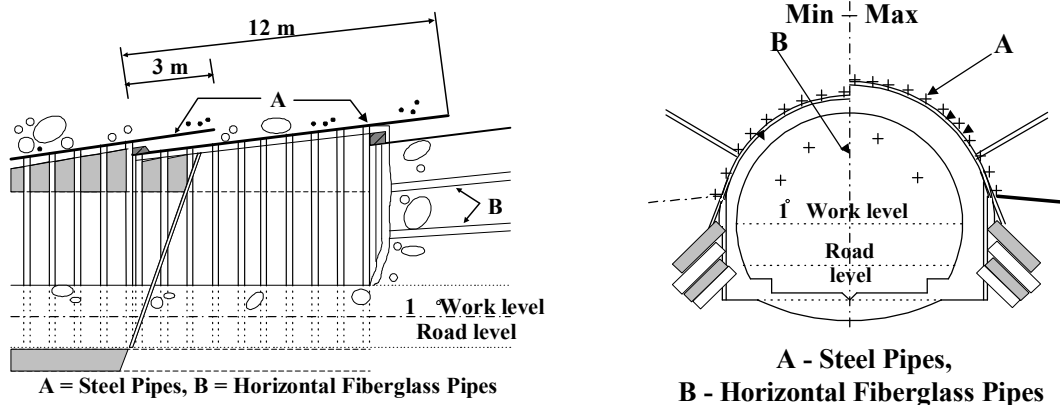


Fig. 1 A schematic view of pipe umbrella and face reinforcing system.

This study aimed at physically investigating the effect of face reinforcement on the face axial displacement and the ground surface settlement. Particular attention was paid to the effect of reinforcement layout on the deformation behavior of tunnels. The results of the model tests were qualitatively compared with those of 3-D non-linear finite-element analyses on prototype tunnels reported by Yoo & Shin (1999) to ascertain the validity of the results of model test.

2. Reduced-scale laboratory model test

2.1 Test configuration

A series of laboratory model tests was conducted in a test box made of a steel frame, having inside dimensions of $1.8 \times 1.0 \times 1.0$ m. The four sidewalls of the test box were constructed using transparent Plexiglas plate for ease of observing the failure mechanism during testing. Possible friction between the inside walls of the test box and the artificially

made ground was minimized by attaching transparency films onto the inside walls. Note that new films were used for each test to eliminate the possible effect of scratches. Due to the symmetry about the tunnel center, only one half of the entire tunnel system was modeled.

The tunnel lining was represented using an 8 mm thick circular Plexiglas plate attached to one of the inside walls. A temporary support at the face during model ground preparation was provided by means of an 8 mm thick Plexiglas plate and a 0.2 mm thick Latex membrane attached inside of the lining. The horizontal pipes were simulated using 3 mm thick bars made of wood, which were specially prepared so as to have a reduced stiffness considering the scaling relation between the model tunnel and a prototype tunnel encountered in the field. When testing deep tunnels, a portion of the model ground above the tunnel crown was simulated by applying an equivalent surcharge pressure on top of the remainder of the ground using an air bag. Figure 2 shows a schematic view of the test box configuration.


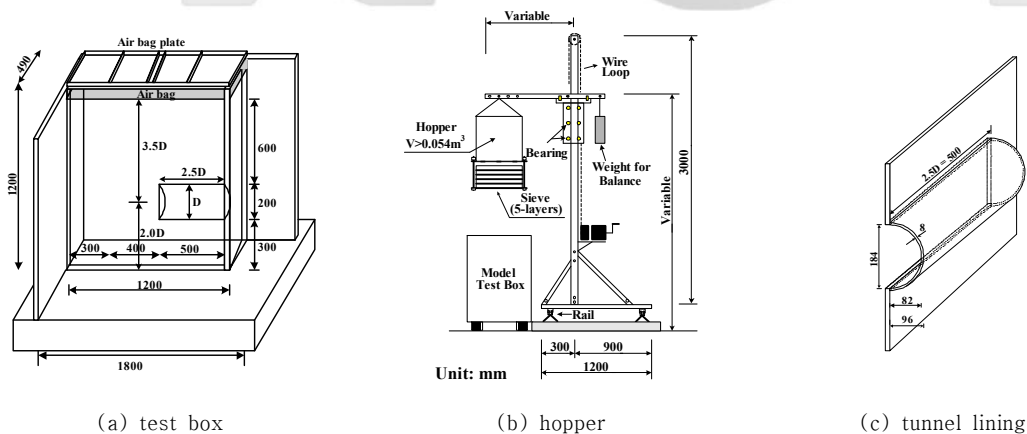


Fig. 2 A schematic view of test configuration.



(a) face pressure controller

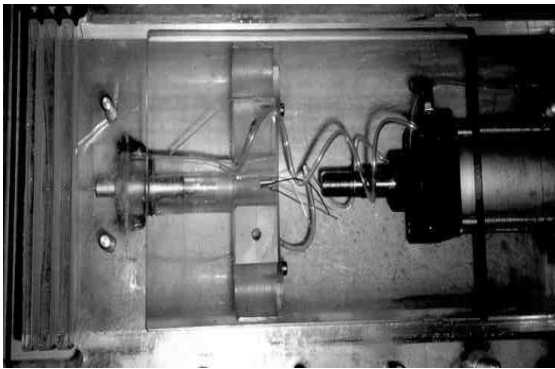

(b) test set-up

Fig. 3 Photos of test configuration.

2.2 Model ground

The model ground was constructed using fine sand by a raining technique with a specially designed hopper system as shown in Figure 2. The effective size (D_{10}), uniformity coefficient (C_u), and coefficient of curvature (C_c) for the sand were 0.36 mm, 1.61, and 1.1, respectively. To obtain consistent soil densities and placement conditions in the models, carefully controlled construction procedures were followed during model preparation. These procedures included sand raining through air at controlled discharge rate and discharge height to give uniform backfill densities. The consistency of the placement density during raining was evaluated using small cans placed at different locations in the test box. The raining technique adopted in this study provided a uniform relative density of approximately 70% with a unit weight of 16 kN/m^3 . A series of direct shear tests was performed to evaluate the shear strength parameters of the model ground using specimens prepared by dry tamping. The estimated internal friction angle at the relative density of 70% was approximately 42° .

A number of evenly spaced markers were placed at

the interface between the wall facing the tunnel and the model ground during model preparation for the purpose of facilitating visualization of the ground movements during testing. A digital video camera set up in front of the sidewall of the test box was used for monitoring of the ground movements. Ground movement patterns for selected stages during testing were then determined by analysing video images of the moving markers taken by the digital video camera.

2.3 Test procedure

At the start of each test, the tunnel lining and the membrane together with the plate at the face were installed first before the raining. The sand was then pluviated through air with the temporary plate and the membrane in place until the backfill was completed to the tunnel crown level. Internal pressure corresponding to a lateral earth pressure at rest was then applied and the plate was removed to create an initial stress condition prior to excavation. Note that the internal pressure was gradually increased further as the raining proceeded using a specially designed pressure controller system. For the rein-

forced conditions, a set of reinforcing elements attached to the membrane at desired locations was pre-installed before raining. Upon completion of the raining to a desired height, the face pressure was then reduced in small steps simulating the excavation procedure. This procedure was initially adopted by Ward and Pender (1981) and has been successfully used by Sterpi et al. (1996). Figure 3 shows the face pressure control device installed inside of the tunnel lining and a typical test set-up.

An extensive monitoring program was implemented to capture fundamental features of ground movements near the face as well as at the ground surface. Monitoring items include the face pressure and the face axial displacement, the surface ground settlement. The applied face pressure was measured using a pressure cell attached to the pressure controller and the face axial displacement and the surface settlement were measured using linear variable displacement transducers (LVDTs). Figure 4 illustrates a schematic view of the data acquisition system.

Conditions tested include both the unreinforced and the reinforced cases for the tunnels with the cover depth ratio of $C/D=1.5$ and 2.5 . For the reinforced cases, the number (NP) and the length (LP) of the reinforcements varied in the ranges of 927 and $0.3\sim$

$1.0D$, respectively. Figure 5 shows the reinforcement layout for the conditions of $NP=9$ and 27 .

3. Results and discussion

3.1 Ground movement pattern

Figure 6 illustrates the qualitative ground movement patterns for the unreinforced and the reinforced cases of $C/D=2.5$. Note that nine reinforcing bars ($NP=9$) with a length of $1.0D$ were used for the reinforced case. As seen, a significant reduction in the ground movements, including the surface settlement, is evident for the reinforced case with the reduction being most pronounced at the face. Of particular feature is that the movements near the tunnel face tend to become more or less horizontal and uniform. Such a movement pattern may represent, to some extent, rigid body movement of the reinforced soil mass, acting as a composite soil mass with enhanced shear strength, due to the lateral thrust acting at the back of the reinforced soil mass. Significant reduction in the movements near the ground surface is also observed.

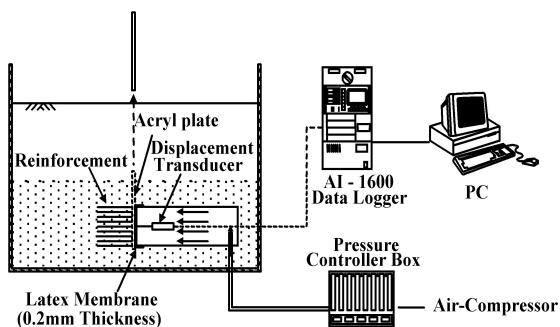


Fig. 4 A schematic view of data acquisition system.



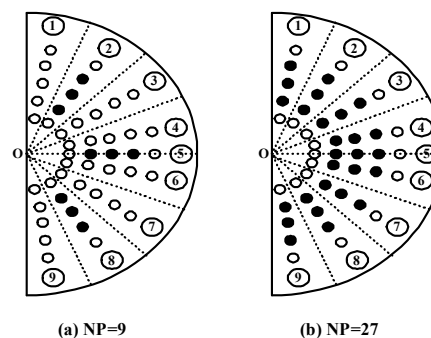


Fig. 5 Reinforcing layout.

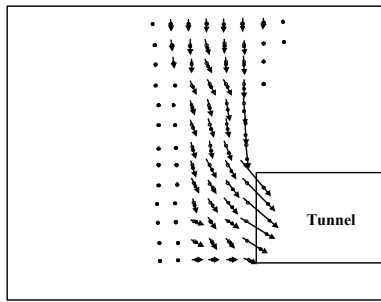

(a) unreinforced

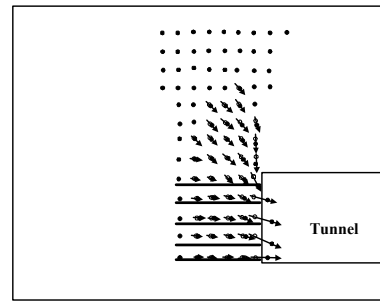

(b) reinforced

Fig. 6 Ground movement patterns for $C/D=2.5$ ($NP=9$, $LP=1.0D$).

3.2 Face displacement

Figure 7 shows the manner in which the face axial displacement (d_f) varies with the face pressure for the unreinforced and the reinforced cases of $C/D=2.5$. Note that the LSR is the degree of face pressure release in relation to the initial stress and is defined as $LSR=(P_o-P_f)/P_o$, where P_o and P_f are the initial stress and the internal (face) pressure, respectively. The LSR, in fact, represents the degree of initial stress relieved or the percentage of initial stress carried by the ground mass prior to the installation of support system. As illustrated, no significant displacement was measured until the face pressure reaches a certain value for both cases.

Further decrease in the face pressure accelerated the yielding of the soil near the face, thus increasing the face displacement. Similar results reported by Chambon & Corte (1992) and Hallak et al. (1994). Note that, for the reinforced case of $NP=27$ and $LP=1.0D$, a significant reduction in the face displacement can be observed, as much as 100% at the final stage when compared with that of the unreinforced case. Furthermore, the LSR value at yield appears to be larger for the reinforced case than for the unreinforced case, suggesting that more load can be carried by the soil around the face

for the reinforced case.

Effects of the number and the length of the reinforcements are illustrated in Figure 8. As one might expect, the increase in the number or the length of the reinforcements decreases the face axial displacement. It is of worth noting that the $LSR-d_f$ curves for $LP=0.6D$ and $1.0D$ practically collapse into one curve, suggesting that any further increase in the reinforcement length beyond $0.6D$ would yield no extra benefit in reducing the face displacement.

Such a trend agrees fairly well with the results of

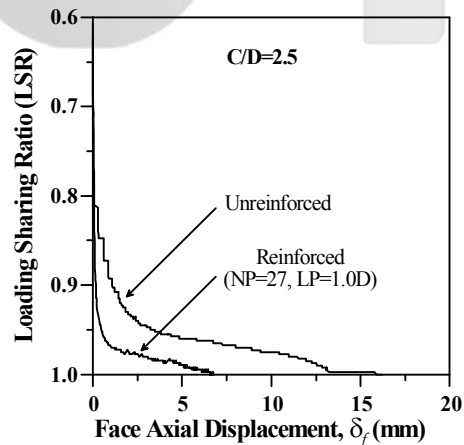


Fig. 7 Effect of face reinforcement on $LSR-\delta_f$.

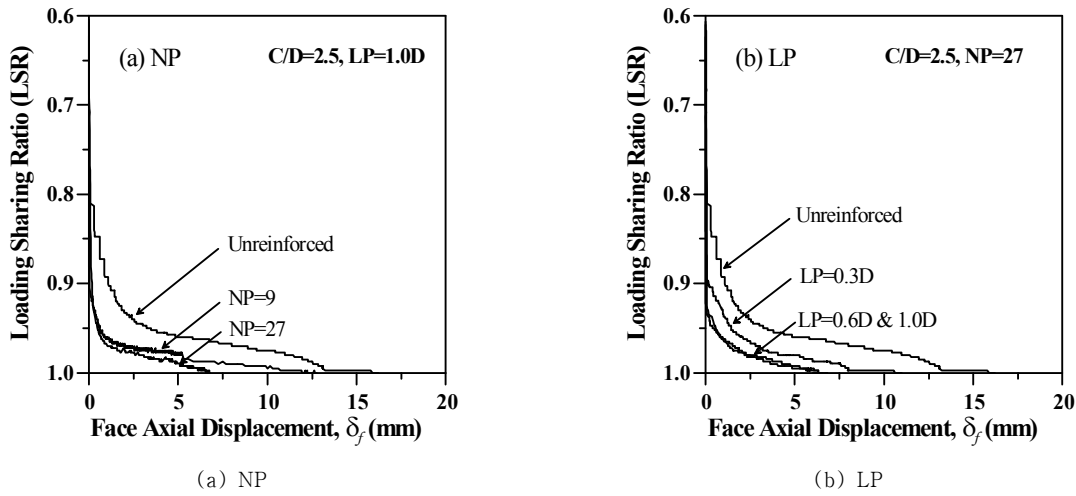


Fig. 8 Effects of NP and LP on LSR- δ_f relationship.

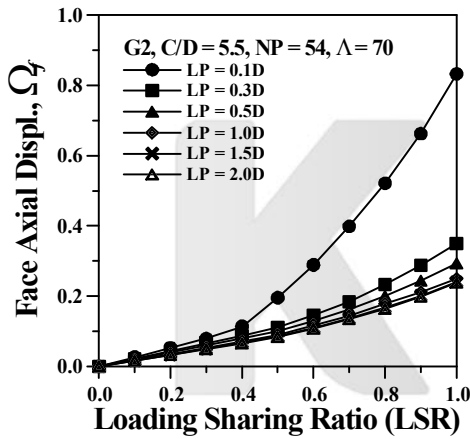


Fig. 9 Effect of LP on LSR- d_f relationship.

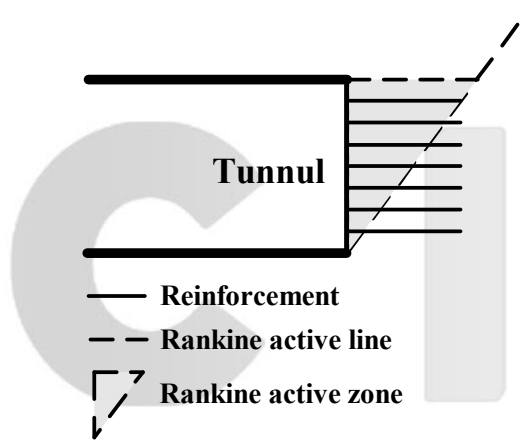


Fig. 10 Rankine active zone ahead of face.

3-D finite-element analyses reported by Yoo & Shin (1999) as observed in Figure 9, showing that any further increase in the length beyond 0.3–0.5D would not have significant impact on the face axial displacement. Note that the finite-element analyses were performed on a prototype-scale tunnel with the same modelling procedure as adopted in this study. Such a trend may well be explained based on the

reinforced earth concept.

As seen in Figure 10, the Rankine active zone extends laterally to 0.5D at the tunnel crown level, and therefore, any decrease in the reinforcement length below 0.5D would result in an increase in the volume of unreinforced zone. The shear deformation in the Rankine active zone, which would be the main source of the overall face displacement, would

therefore be accelerated when the reinforcement length is reduced below $0.5D$. Such a trend suggests that a minimum length of $0.5D$ should be maintained to prevent excessive face displacement, and supports the current design practice which adopts a minimum overlap length of $0.3\sim 0.4D$ (Peila, 1994).

3.3 Surface settlement

Ground movement control has become a major design issue in urban tunnelling whereby damage of adjacent buildings and utilities associated with ground movements should be minimized. During tunnelling, the buildings and the utilities experience a temporary wave of ground movements. Obviously, excessive face movement inevitably causes ground movements ahead of the face, and nearby structures and the utilities may suffer from various degrees of structural damage by the longitudinal settlement trough.

Figure 11 illustrates the effect of face reinforcement on the surface settlement. As seen in Figure 11(a), the face reinforcement significantly

reduces the maximum surface settlement. The effect of face reinforcement on the surface settlement is better illustrated in the longitudinal surface settlement troughs as seen in Figure 11(b). As illustrated in this figure, the face reinforcement significantly reduces the maximum surface settlement that occurs immediately above the face. The slope of the trough, which is in turn a measure of the angular distortion imposed on a structure within the settlement trough, appears also to be reduced for the reinforced case. Such a trend suggests that the face reinforcement technique can also be used as a positive measure of ground movement control in urban tunnelling. Similar results were reported by Calvello & Talyor (1999).

4. Conclusions

A series of reduced-scale laboratory tests was conducted to investigate the deformation behavior of tunnels reinforced with longitudinal pipes at the face. The model tunnel including the auxiliary devices

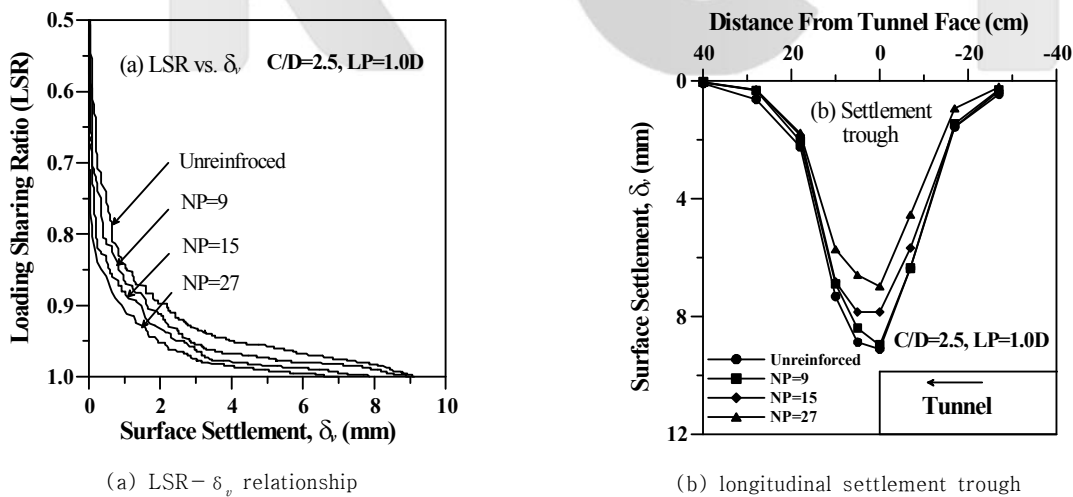


Fig. 11 Effect of face reinforcement on surface settlement.

were specially designed and constructed so as to capture the fundamental features of tunnel construction process and to monitor the tunnel behavior. Using the relationships between the face pressure and the face displacement as well as the surface settlement, the effect of the face reinforcement layout on the deformation behavior of tunnel was then evaluated. Based on the results of the present investigation, the following conclusions can be drawn.

1. The face reinforcement technique can be effectively used not only to improve the face stability but also to control the surface settlement ahead of the face. The concept of the reinforced earth can be applied to explain the general behavior and may be brought into the design and analysis method with further study.
2. The effectiveness of the face reinforcement depends greatly on the reinforcement layout such as the number and the length of the reinforcements. For an optimum design, the reinforcement layout should therefore be selected with due consideration of the tunnel geometry and the ground condition.
3. For the reinforced tunnel, the yielding of the soil around the tunnel appears to be accelerated when the reinforcement length becomes less than 0.5D. This result supports the current design approach, which adopts a minimum overlap length of the pipes as 0.3~0.4D.

Acknowledgements

This research was supported by Faculty Research Fund from Sungkyunkwan University in 1998 and by SAFE (SAFEty and Structural Integrity Research Center) at Sungkyunkwan University. The financial support is gratefully acknowledged.

References

1. Arseno, F. P. et al. (1991). "La prima applicazione in Italia del pretaglio meccanico." *Int. Congr. on Soil and Rock Improvement in Underground Works*, Milano, pp.649–556.
2. Calvello, M. & Taylor, R.N.(1999). "Centrifuge modelling of a spile-reinforced tunnel heading." *Int. Symp. Geotechnical Aspects of Underground Construction in Soft Ground*. Tokyo, pp.345–350.
3. Dias, D. et al. (1998). Behavior of a tunnel face reinforced by bolts: comparison between analytical and numerical models. *2nd Int. Symp. Geotech. Engrg. Hard Soils–Soft Rocks, Napels, Italy*.
4. Jassionnesse, C.(1996) Controle du massif renforce par boulonnage au front de taille d'un tunnel. *Etude d'un cas reel en site urbain: Exploitation des mesures et modelisation par une methode d'homogeneisation*. Ph.D. thesis INSA Lyon.
5. Lunardi, P. (1991). Aspetti progettuali e costruttivi nella realizzazione di gallerie in situazioni difficili: interventi di precontenimento del cavo: *Int. Congr. on Consolidamento del suolo e rocce in sotterraneo. 2*, Milan, pp.567–580.
6. Lunardi, P. et al. (1992). A. Tunnel face reinforcement in soft ground design and controls during excavation. *Int. Congr. Towards New Worlds in Tunnelling. 2*, Acapulco, p. 897–908.
7. Peila, D. (1994). A theoretical study of reinforcement influence on the stability of a tunnel face. *Geotechnical and Geological Engineering*, 12, pp. 145–168.
8. Peila, D. et al. (1996). Study of the influence of sub-horizontal fiber-glass pipes on the stability of a tunnel face. *Proc. Int. Conf. on North American Tunnelling '96. 1*, pp.425–431.
9. Poma, A. et al. (1995). Finite difference analysis of displacement measurements for optimizing tunnel construction in swelling soils. *Field Measurements in Geomechanics 4th International*. Symposium, Bergamo, pp.225–236.
10. Wong, H. et al. (1997). *Comportement du front d'un tunnel renforce apr des inclusions en fibre de verre, modele analytique. Geomateriaux Environnement Ouvrages, 2*, France, pp.133–147.
11. Yoo, C. S. & Shin, H. K. (1999). Behavior of tunnel face pre-reinforced with sub-horizontal pipes. *Int. Symp. Geotechnical Aspects of Underground Construction in Soft Ground*. Tokyo, pp. 345–350.



유충식

성균관대학교 토목환경공학과 부교수
csyoo@yurim.skku.ac.kr

양기호

성균관대학교 토목공학과
대학원 수료

K C I